



Protect Your Pumps Against Shotcrete Polyfibre

Tough Pump for the Modern Miner. Many dewatering pumps were designed before Shotcrete was widely used in underground mining. Shotcrete fibres are now a major cause of underground dewatering pump failure and production delay. In a multi-million dollar operation, even small delays can be expensive.

Benefits of JetGuard® for Mining Operators



Performance

Increase mine performance, productivity and profit by reducing breakdowns and delays. Safety

Reduce workplace hazards by reducing the number of breakdowns.



PumpEnd

JetGuard

am

OTEN

Reduce equipment lifecycle cost by increasing total pump life.

PumpEng

JetGuard

OIT

Patent Numbers:

AUSTRALIA - 2015230662 | CANADA - 2941904 | USA - 10514047 CHILE 59.801 | SOUTH AFRICA 2016/06902




About Us

PumpEng is on a mission to redefine underground mine dewatering, prioritising excellence at every turn. Our commitment to innovation, reliability, availability, and personalised support throughout the product lifecycle ensures every mine operator a good day at work.

PumpEng is an Australian-based global Original Equipment Manufacturer (OEM) with a rich history of supplying submersible pumps to the mining sector. Renowned for excellence and innovative pumping solutions, we are a trusted global mining partner. Our core competencies include submersible pump design, manufacture, assembly and application guidance. A commitment to eco-friendly solutions reflects environmental responsibility. Our client-centric approach fosters enduring partnerships worldwide, providing exceptional service and support. PumpEng upholds the highest standards and meets international regulations. PumpEng stands as a beacon of global OEM manufacturing, epitomising reliability, innovation, and customer-centricity for the mining sector. We're available, supportive, innovative and consultative.



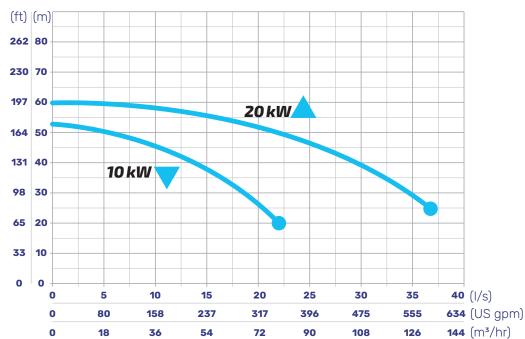

Power Curves (50 & 60Hz)





Hydraulic barrier to keep fibre out



Cutting plate to chop fibre down



Metal wet end for longer pump life

JetGuard[®] Specifications

Model	kW (Hp)	Discharge	Voltage (Hz)	Solids Passage in mm	Max Head m (ft)	Max Flow I/s	Max Diameter mm	Height mm	Weight kg
JP1041291	10 (14)	80mm	415 (50)	5	53 (173)	23	358	780	140
JP1041391	10 (14)	80mm	1000 (50)	5	53 (173)	23	358	780	140
JP1041491	10 (14)	80mm	600 (60)	5	53 (173)	23	358	780	140
JP1041591	10 (14)	80mm	480 (60)	5	53 (173)	23	358	780	140
JP1041791	10 (14)	80mm	1000 (60)	5	53 (173)	23	358	780	140
JP2031291	20 (27)	100mm	415 (50)	5	60 (196)	37	475	787	180
JP2031391	20 (27)	100mm	1000 (50)	5	60 (196)	37	475	787	180
JP2031491	20 (27)	100mm	600 (60)	5	60 (196)	37	475	787	180
JP2031591	20 (27)	100mm	480 (60)	5	60 (196)	37	475	787	180
JP2031791	20 (27)	100mm	1000 (60)	5	60 (196)	37	475	787	180

Motor Specifications					
Pole	2-Pole				
Insulation Class	Class F/H				
Motor Power Details	1000V, 415V 50Hz 480V, 600V & 1000V 60Hz				
Max Liquid Temp	Fluid at 40°C				
Max Submergence	22m				

Pump Specifications					
Impeller	27 Chrome				
Wear Parts	27 Chrome / CD4				
Mechanical Seal	TC/TC/SS				
Bearing	Heavy duty bearings				
Outer Jacket	Stainless Steel				
Shaft	Stainless Steel				

Why The JetGuard® Pump Range Is Better:

, Protected - Less Fibre Gets In

A hydraulic curtain repels surface fibre, and the suction strainer intake is on the bottom of the pump, not the side. So less Shotcrete fibre gets inside. If any fibres do get in, a cutter plate chops up fibres into tiny pieces.

2. Toughened - Metal Is Best

Internal components in the wet end are tough metal, not elastomer. Fibre and tramp can more quickly destroy elastomer components, while toughened steel components power on. The mechanical seal is in a non pressurised zone, away from the high pressure discharge area and removed from the fluid/Shotcrete path. JetGuard® is dry run tolerant and can run on the snore.

3. Productive - Less Downtime More Production

JetGuard® has been designed for tough environments, to keep on pumping when traditional dewatering pumps might fail. Less mining downtime, more production.



PumpEng® offers a full range of services for submersible pumps including:

Hire

Spare Parts

Repairs

Ongoing Support





Tough Submersible Pumps

Explore Your Options

PumpEng Pty Ltd



Perth (08) 9434 9922 U3, 22-24 Alex Wood Drive Forrestdale WA 6112

PO Box 1122 Bibra Lake 6965



T (0

Townsville (07) 4766 3160 64-66 Crocodile Crescent Mount St John QLD 4818



Adelaide

(08) 8448 9830 U3, 9-11 Peekara Street Regency Park SA 5010

North America +1 (208) 749 7636

635 5th Ave West Twin Falls ID 83301

Email Direct

 \square

sales@pumpeng.com.au



pumpeng.com.au

International Distribution Network

