
PumpEng

Raptor



Benefits of Raptor® for Mining Operations

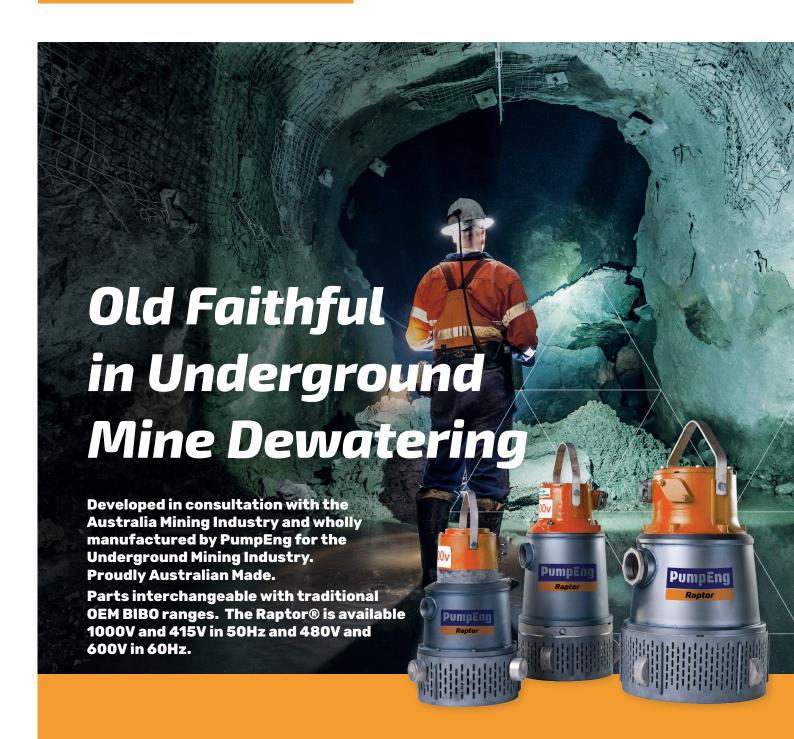

Performance



Safety



Cost

Increase mine performance, productivity and profit by reducing breakdowns and delays.

Reduce workplace hazards by reducing the number of breakdowns. Reduce equipment lifecycle cost by increasing total pump life.



PumpEng is on a mission to redefine underground mine dewatering, prioritising excellence at every turn. Our commitment to innovation, reliability, availability, and personalised support throughout the product lifecycle ensures every mine operator a good day at work.

PumpEng is an Australian-based global Original Equipment Manufacturer (OEM) with a rich history of supplying submersible pumps to the mining sector. Renowned for excellence and innovative pumping solutions, we are a trusted global mining partner. Our core competencies include submersible pump design, manufacture, assembly and application guidance. A commitment to eco-friendly solutions reflects environmental responsibility.

Our client-centric approach fosters enduring partnerships worldwide, providing exceptional service and support. PumpEng upholds the highest standards and meets international regulations. PumpEng stands as a beacon of global OEM manufacturing, epitomising reliability, innovation, and customer-centricity for the mining sector. We're available, supportive, innovative and consultative.

Power Curves (50 & 60Hz)





Raptor® Specifications

| Model | kW (Hp) | Discharge | Voltage (Hz) | Solids Passage in mm | Max Head in m (ft) | Max Flow I/s | Max Diameter mm | Height mm | Weight kg |
|-----------|---------|-----------|--------------|----------------------------|--------------------|-----------------|-----------------------|--------------|--------------|
| PE0512291 | 5 (7) | 50mm | 415 (50) | 8 | 41 (134) | 15 | 350 | 550 | 57 |
| PE0812291 | 8 (11) | 80mm | 415 (50) | 8 | 72 (236) | 14 | 380 | 720 | 105 |
| PE2012291 | 20 (27) | 100mm | 415 (50) | 8 | 74 (243) | 39 | 520 | 765 | 185 |
| PE0512391 | 5 (7) | 50mm | 1000 (50) | 8 | 41 (134) | 15 | 350 | 550 | 57 |
| PE0812391 | 8 (11) | 80mm | 1000 (50) | 8 | 72 (236) | 14 | 380 | 720 | 105 |
| PE2012391 | 20 (27) | 100mm | 1000 (50) | 8 | 74 (243) | 39 | 520 | 765 | 185 |
| PE0512491 | 5 (7) | 50mm | 600 (60) | 8 | 41 (134) | 15 | 350 | 550 | 57 |
| PE0812491 | 8 (11) | 80mm | 600 (60) | 8 | 72 (236) | 14 | 380 | 720 | 105 |
| PE2012491 | 20 (27) | 100mm | 600 (60) | 8 | 74 (243) | 39 | 520 | 765 | 185 |
| PE0812591 | 8 (11) | 80mm | 480 (60) | 8 | 72 (236) | 14 | 380 | 720 | 105 |
| PE2012591 | 20 (27) | 100mm | 480 (60) | 8 | 74 (243) | 39 | 520 | 765 | 185 |

| Motor Specifications | | | | | |
|----------------------|--|--|--|--|--|
| Pole | 2-Pole | | | | |
| Insulation Class | Class F/H | | | | |
| Motor Power Details | 1000V, 415V 50Hz 480V, 600V, 1000V 60Hz | | | | |
| Max Liquid Temp | Fluid at 40°C | | | | |
| Max Submergence | 22 m | | | | |

| Pump Specifications | | | | |
|---------------------|---------------------------------|--|--|--|
| Impeller | 27 Chrome or CD4 | | | |
| Wear Parts | Polyurethane Lined | | | |
| Mechanical Seal | Sic-Sic | | | |
| Bearing | Heavy duty bearings | | | |
| Outer Jacket | Aluminium or Stainless Steel | | | |
| Shaft | Stainless Steel | | | |



PumpEng® offers a full range of services for submersible pumps including:

Hire

Spare Parts

Repairs

Ongoing Support



Tough Submersible Pumps

Explore Your Options

PumpEng Pty Ltd



Perth

(08) 9434 9922 U3, 22-24 Alex Wood Drive Forrestdale WA 6112

PO Box 1122 Bibra Lake 6965



Kalgoorlie

(08) 9021 5965 55 Oroya Street Boulder WA 6432



Townsville

(07) 4766 3160 64-66 Crocodile Crescent Mount St John QLD 4818



Adelaide

(08) 8448 9830 U3, 9-11 Peekara Street Regency Park SA <u>5010</u>



North America

+1 (208) 749 7636 635 5th Ave West Twin Falls ID 83301

Email Direct



sales@pumpeng.com.au



pumpeng.com.au

International Distribution Network

